

SUBMERSIBLE PUMPS

JS/T DRAINER ALL 316 STAINLESS STEEL PUMPS

A

Precision cast 316 stainless steel drainer pumps. Elastomers and O rings are made from Viton. Side vertical outlet, twin Viton mechanical seals, carbon ceramic and silicon carbide in a lubricated chamber. Complete with 10 metres of power cable. Hose tails are supplied with all 2" and 3" models. Suitable for effluent waste water, corrosive liquids and chemical sumps, check for compatibility. Automatic pumps fitted with MAC-3 floats, allow approx 300mm away from the pump to operate correctly. See pages 78-81 for control panels and 88-89 for float switches.

Features

S/Steel Pump Body
S/Steel Impeller
Max Solids 6mm

Applications


Light Chemical Waste
Heavy Duty
Clean Water
Dirty Water
Drainage



JS400SS



JST22SS

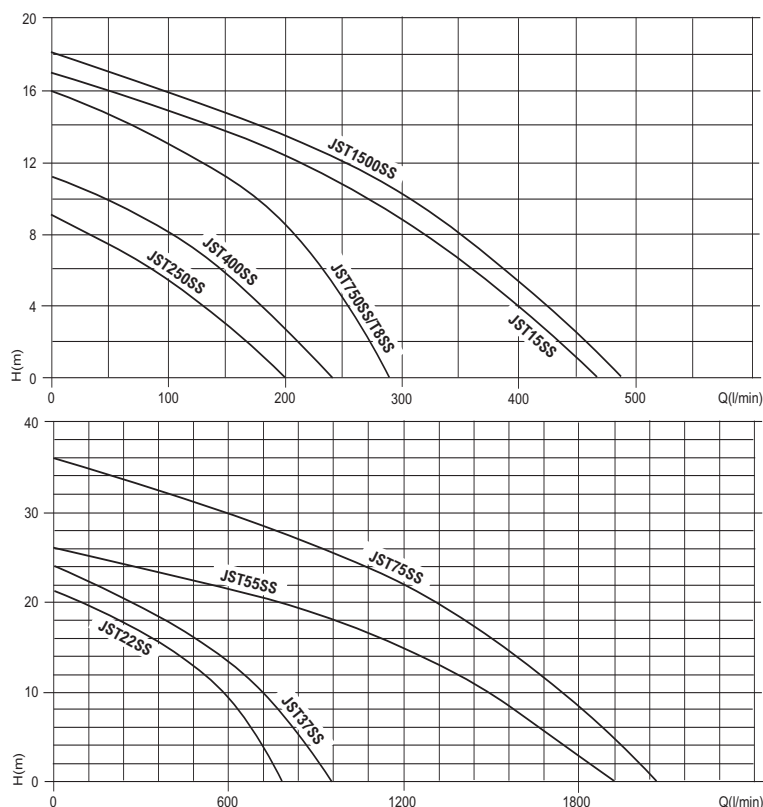

MODEL	VOLT	OUTLET	LM/HM	Kw	AMP	H x W x L mm	Kg	CODE
JS-250SS MANUAL	230v	1½"	200/9.5	0.25	1.9	370 x 150 x 220	12	011-300
JS-250SS MANUAL	110v	1½"	200/9.5	0.25	4	370 x 150 x 220	12	011-304
JS-400SS MANUAL	230v	2"	240/11.5	0.4	3.8	420 x 150 x 220	15	011-308
JS-400SS MANUAL	110v	2"	240/11.5	0.4	7.6	420 x 150 x 220	15	011-312
JS-400SS MANUAL 60Hz	230v	2"	240/11.5	0.4	3.8	420 x 150 x 220	15	011-316
JS-750SS MANUAL	230v	2"	295/16	0.75	6.8	480 x 195 x 255	26	011-320
JS-750SS MANUAL	110v	2"	295/16	0.75	13.0	480 x 195 x 255	26	011-324
JS-1500SS MANUAL	230v	3"	485/18	1.5	12	510 x 195 x 285	32	011-328
JST-8SS	400v	2"	295/16	0.75	1.8	420 x 190 x 310	24	011-332
JST-15SS	400v	3"	465/17.5	1.5	3.2	440 x 190 x 260	28	011-336
JST-22SS	400v	3"	780/21	2.2	4.6	510 x 220 x 315	39	011-340
JST-37SS	400v	4"	965/24	3.7	7.9	525 x 220 x 320	44	011-344
JST-55SS	400v	4"	1920/26	5.5	11.5	640 x 280 x 500	66	011-348
JST-75SS	400v	6"	2065/35.5	7.5	15.2	720 x 280 x 500	76	011-352

JS SINGLE PHASE MODELS CAN BE MODIFIED FOR AUTOMATIC OPERATION

TYPE	CODE
MAC3 (ALL MODELS)	020-001
AGMA*	020-003

*Not recommended for JS-750 110v or JS-1500 230v.



MAC3



AGMA