
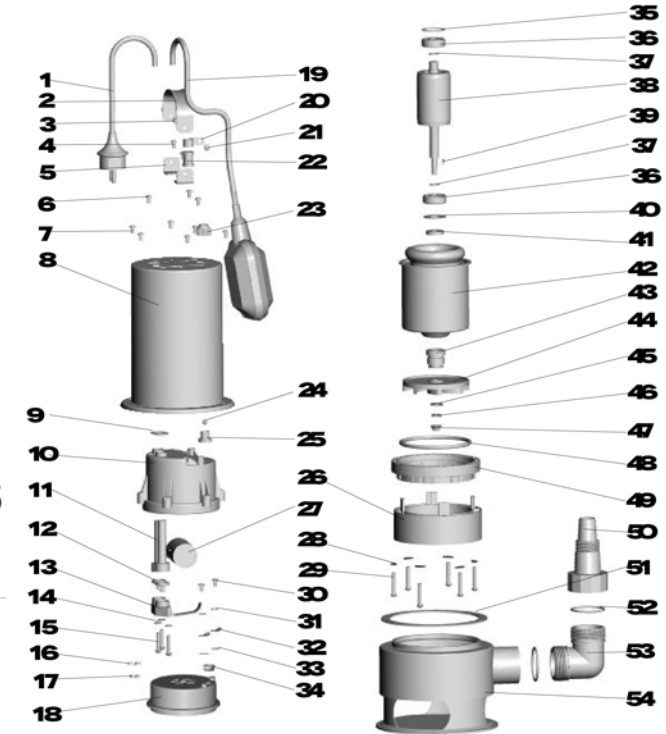


XKS-1001SW

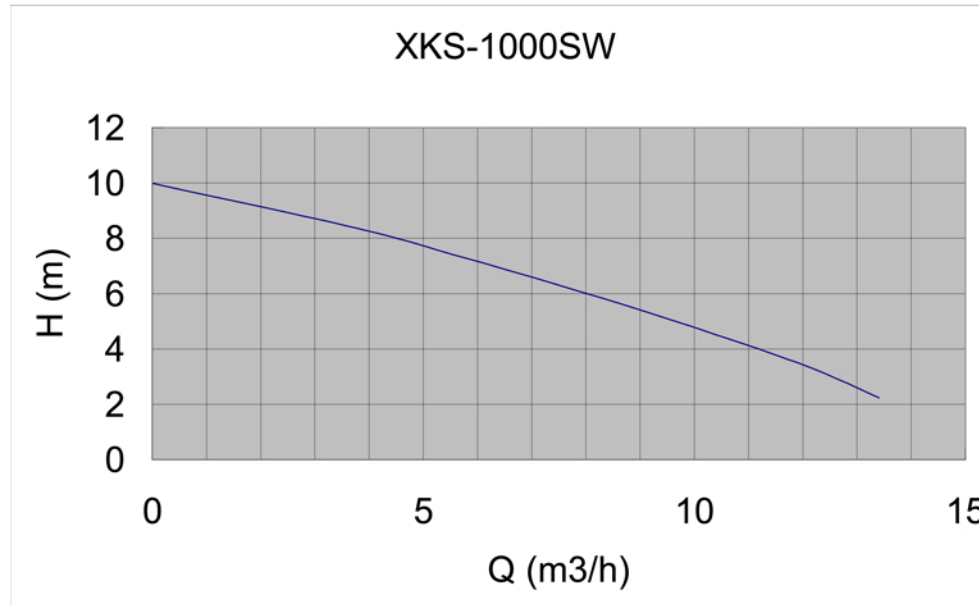

This pump is mainly used in swimming pools and small landscapes

Features and Benefits

It can be used to transfer sewage water and clean water.

The pump can be submerged into the water permanently.

Using the integrated float switch the pump can be left to function un attended. Overheat protector protects motor from burning out.

The pump comes fitted with 10m cable. This pump is not to transfer saline water, flammable liquids, and foodstuff.

Type	Garden submersible pump			
Model	XKS-401SW	XKS-551SW	XKS-751SW	XKS-1001SW
Supply power	220-240V/50Hz	220-240V/50Hz	220-240V/50Hz	220-240V/50Hz
Input power	400W	550W	750W	1000W
Max. head	6m	6m	8m	11m
Max. flow	9m³/h	10m³/h	14m³/h	14.5m³/h
Max. dia. of particle	35mm	35mm	35mm	35mm
Outlet	25/32mm	25/32mm	25/32mm	25/32mm
Cable	H05RN-F 10m	H05RN-F 10m	H07RN-F 10m	H07RN-F 10m
Operating limits	Fluid temperature up to 35°C; Ambient temperature up to 40°C.			